



DISPENSING SOLUTIONS › PROGRESS 5000 HH

✓ TECHNICAL SPECIFICATIONS

| MAIN FEATURES | |
|---------------------|---|
| Construction | Frame: Galvanised Steel; Double Coated Painting Housing: Stainless Steel Panels: Aluminium; Double Coated Painting |
| Admission | Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump |
| Meter | Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration |
| Filters | Reusable Stainless Steel, 100 µm mesh |
| Motor | Exd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection |
| Display | Larger and brighter display, providing crisp digits under any lighting conditions. 7 digits for sale (31,75mm), 7 digits for volume and 6 digits for unit price |
| Calculator | eMC ² Electronic Modular Calculator, 2nd Generation |
| Hose | Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved) |
| Nozzle | Automatic ZVA2 or Others |
| Fuel Types | Petrol Diesel Biodiesel HVO Ethanol (E85) ⁽¹⁾ AdBlue wo/heating ⁽¹⁾ |
| Flow Rates | 10, 40, 80, 130 L/min Up to 4 Products / 8 Hoses |
| Certificates | ATEX; MID |




(1) Only available with pressure pumps.

| OPTIONS | | |
|--------------------------------------|---------------------------------------|---|
| - Speed Selector (40/80 L/min) | - Low Temperature Kit | - TAGs |
| - Electro-mechanical Totalizers | - Satellite Ready (1 per side) | - Multimedia |
| - Volume Preset | - Breakaway Couplings | - Lifting Solution (for easier handling) |
| - Amount Preset | - Custom Nozzles and Sleeves | - Unit Price Display |
| - Circuit Breaker | - Flexible Riser Connection | - Vapour Recovery Stage II |
| - Electronics Head Heating | - Stainless Steel AISI304 Image Panel | - Vapour Recovery w/Monitoring |
| - Automatic Temperature Compensation | - Stainless Steel AISI316 | - OPT* |
| - Single/ Three-Phase Motor | - Foundation Frame | (*) Integration with wide range of terminals. |
| - Voice Module | - Custom Corporate Image | |




| COMMUNICATION PROTOCOLS/INTERFACES | | |
|------------------------------------|------------------------------|----------------------|
| - Petrotec | - IFSF IP | - HDX 2WI (Gilbarco) |
| - EPSS | - IFSF Lon v1.xx (Converter) | - DART |
| - Pulse Interface | - IFSF Lon v2.xx | - Dunclare |
| - ER3 | - HDX 485 (Gilbarco) | - Pumalan |

✓ AVAILABLE CONFIGURATIONS

P5000 HH - 1P-2P-3P-4P

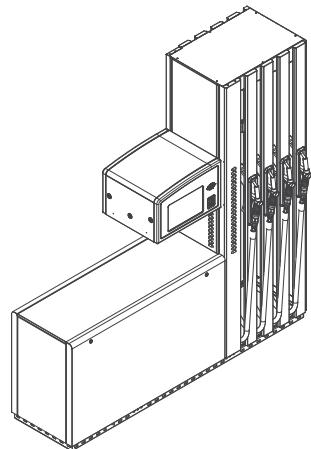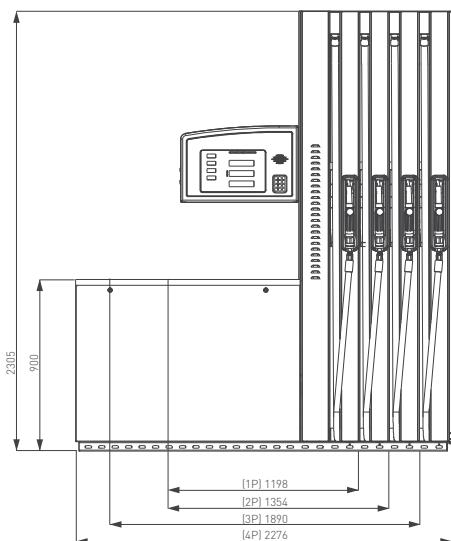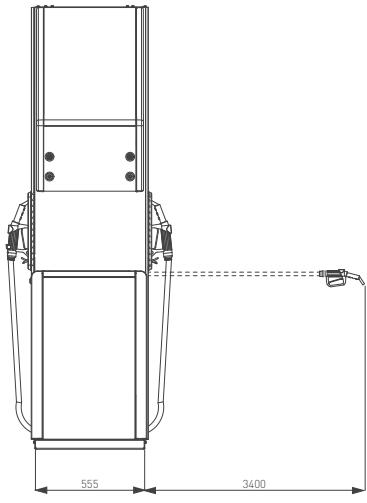

P5000 HH - OPT OPTION

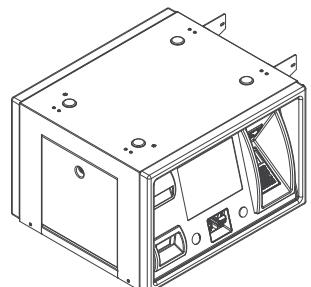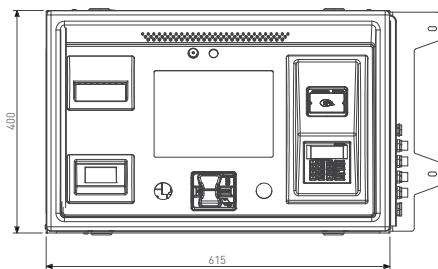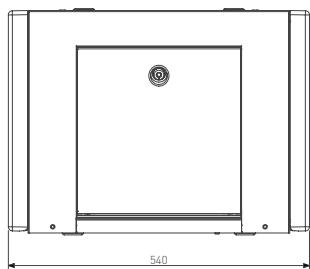

Note: All dimensions are in mm.

© 2023 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

