



# DISPENSING SOLUTIONS

## PROGRESS

### 4000 C / CR

#### TECHNICAL SPECIFICATIONS

MAIN FEATURES	
<b>Construction</b>	Frame: Galvanised Steel; Double Coated Painting Housing: Stainless Steel Panels: Aluminium; Double Coated Painting
<b>Admission</b>	Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump
<b>Meter</b>	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration
<b>Filters</b>	Reusable Stainless Steel, 100 µm mesh
<b>Motor</b>	Exd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection
<b>Display</b>	Larger and brighter display, providing crisp digits under any lighting conditions. 7 digits for sale (31,75mm), 7 digits for volume and 6 digits for unit price
<b>Calculator</b>	eMC <sup>2</sup> Electronic Modular Calculator, 2nd Generation
<b>Hose</b>	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved)
<b>Nozzle</b>	Automatic ZVA2 or Others
<b>Fuel Types</b>	Petrol   Diesel   Biodiesel   HVO   Ethanol (E85) <sup>(1)</sup>   AdBlue wo/heating <sup>(1)</sup>
<b>Flow Rates</b>	10, 40, 80, 130 L/min   Up to 4 Products / 8 Hoses
<b>Certificates</b>	ATEX; MID


(1) Only available with pressure pumps.

OPTIONS		
- Speed Selector (40/80 L/min)	- Low Temperature Kit	- TAGs
- Electro-mechanical Totalizers	- Satellite Ready (1 per side)	- Multimedia
- Volume Preset	- Breakaway Couplings	- Partial Retraction System (only available in CR version)
- Amount Preset	- Custom Nozzles and Sleeves	- Lifting Solution (for easier handling)
- Circuit Breaker	- Flexible Riser Connection	- Vapour Recovery Stage II
- Electronics Head Heating	- Stainless Steel AISI304 Image Panel	- Vapour Recovery w/Monitoring
- Automatic Temperature Compensation	- Stainless Steel AISI316 Housing	- OPT*
- Single/ Three-Phase Motor	- Foundation Frame	(*) Integration with wide range of terminals.
- Voice Module	- Custom Corporate Image	


COMMUNICATION PROTOCOLS/INTERFACES		
- Petrotec	- IFSF IP	- HDX 2WI (Gilbarco)
- EPSS	- IFSF Lon v1.xx (Converter)	- DART
- Pulse Interface	- IFSF Lon v2.xx	- Dunclare
- ER3	- HDX 485 (Gilbarco)	- Pumalan

# ✓ AVAILABLE CONFIGURATIONS

P4000C - 1P2H

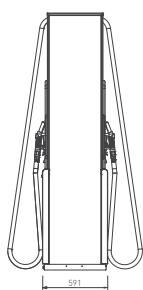


P4000C - 1P2H W/OPT

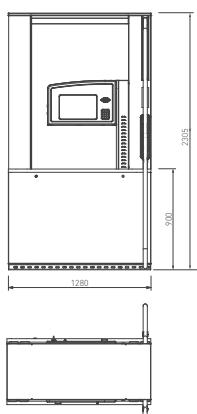

P4000C - 2P4H





P4000C - 2P4H W/OPT

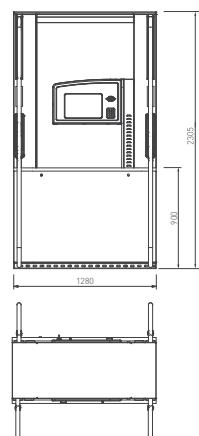


P4000C - 2P4H W/OPT


P4000C - 3P6H

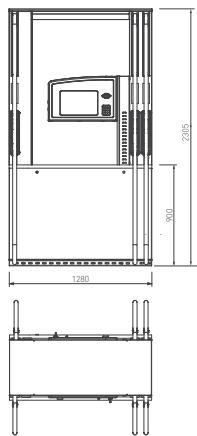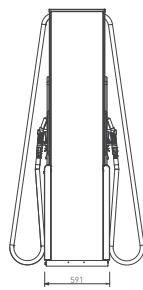


P4000C - 3P6H W/OPT

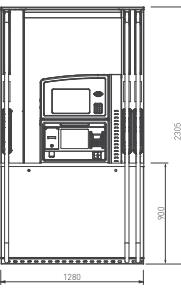


P4000C - 4P8H

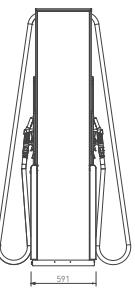


P4000C - 4P8H W/OPT

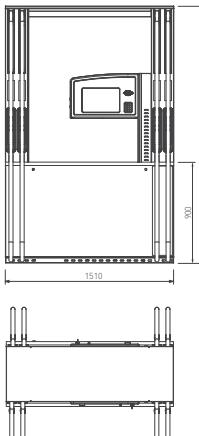

P4000C - HANGING HOSE

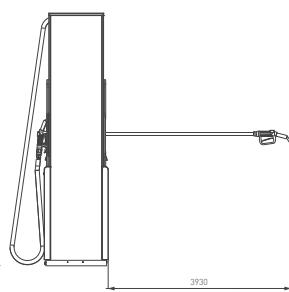

P4000C - HOSE RETRACTION

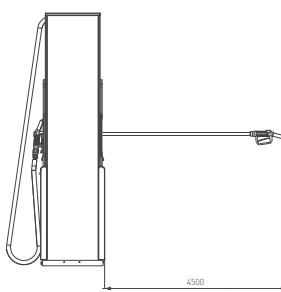

Note: All dimensions are in mm.

© 2023 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

