



# DISPENSING SOLUTIONS

## PROGRESS

## 5000 LH

### ✓ TECHNICAL SPECIFICATIONS

#### MAIN FEATURES

Construction	Frame: Galvanised Steel; Double Coated Painting Housing: Stainless Steel Panels: Aluminium; Double Coated Painting
Admission	Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump
Meter	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration
Filters	Reusable Stainless Steel, 100 µm mesh
Motor	Exd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection
Display	Larger and brighter display, providing crisp digits under any lighting conditions. 7 digits for sale (31,75mm), 7 digits for volume and 6 digits for unit price
Calculator	eMC <sup>2</sup> Electronic Modular Calculator, 2nd Generation
Hose	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved)
Nozzle	Automatic ZVA2 or Others
Fuel Types	Petrol   Diesel   Biodiesel   HVO   Ethanol (E85) <sup>(1)</sup>   LPG <sup>(1)</sup>   AdBlue <sup>(1)</sup>
Flow Rates	10, 40, 80, 130 L/min   Up to 5 Products / 10 Hoses
Certificates	ATEX; MID

(1) Only available with pressure pumps.

#### OPTIONS




- Speed Selector (40/80 L/min)	- Satellite Ready (1 per side)	- Multimedia
- Electro-mechanical Totalizers	- Breakaway Couplings	- Lifting Solution (for easier handling)
- Volume Preset	- Custom Nozzles and Sleeves	- Unit Price Display
- Amount Preset	- Flexible Riser Connection	- Vapour Recovery Stage II
- Circuit Breaker	- Stainless Steel AISI304 Image Panel	- Vapour Recovery w/Monitoring
- Electronics Head Heating	- Stainless Steel AISI316 Housing	- Main Safety Switch (LPG)
- Automatic Temperature Compensation	- Foundation Frame	- AdBlue Hydraulic Housing Heating (ATEX)
- Single/ Three-Phase Motor	- Custom Corporate Image	- AdBlue Hydraulic Housing Heating
- Voice Module	- TAGs	(*) Integration with wide range of terminals.
- Low Temperature Kit	- OPT*	

#### COMMUNICATION PROTOCOLS/INTERFACES




- Petrotec	- IFSF IP	- HDX 2WI (Gilbarco)
- EPSS	- IFSF Lon v1.xx (Converter)	- DART
- Pulse Interface	- IFSF Lon v2.xx	- Dunclare
- ER3	- HDX 485 (Gilbarco)	- Pumalan

## ✓ AVAILABLE CONFIGURATIONS




P5000 LH - 1P-2P-3P-4P-5P

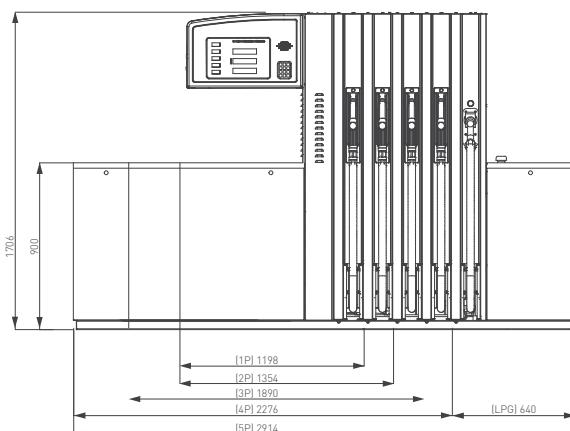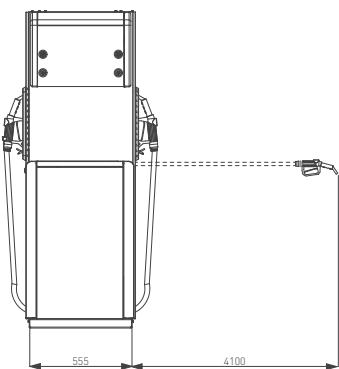

P5000 LH - 1P-AdBlue with heating

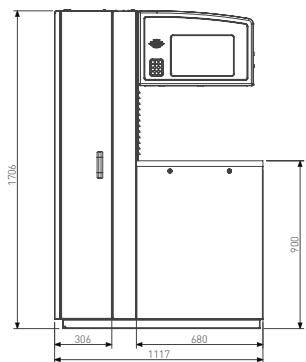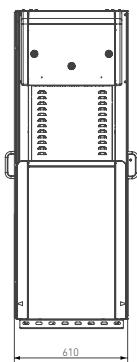

P5000 LH - OPT OPTION

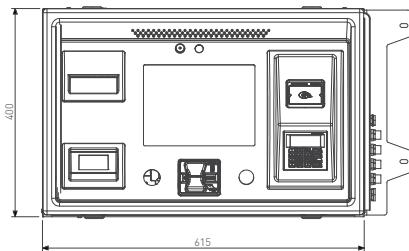

Note: All dimensions are in mm.

© 2023 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

