



## DISPENSING SOLUTIONS

# › PROGRESS

# 1000

### ▼ TECHNICAL SPECIFICATIONS

| MAIN FEATURES |   |
|---------------|---|
| Construction  | Frame: Galvanised Steel; Double Coated Painting<br>Housing: Stainless Steel<br>Panels: Aluminium; Double Coated Painting  |
| Admission     | Suction: High Performance Compact Gear Pump RTF<br>Pressure: Submersible Pump   |
| Meter         | Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration   |
| Filters       | Reusable Stainless Steel, 100 µm mesh   |
| Motor         | Exd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection   |
| Display       | Larger and brighter display, providing crisp digits under any lighting conditions. 7 digits for sale (31,75mm), 7 digits for volume and 6 digits for unit price |
| Calculator    | eMC Counter w/Pulse Interface   |
| Hose          | Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved)  |
| Nozzle        | Automatic ZVA2 or Others  |
| Fuel Types    | Petrol   Diesel   Biodiesel   Ethanol (E85) (1)   AdBlue (1)  |
| Flow Rates    | 10, 40, 80, 130 L/min   Up to 1 Products / 2 Hoses  |
| Certificates  | ATEX  |


(1) Only available with pressure pumps.

| OPTIONS                         |   |                                       |
|---------------------------------|---|---------------------------------------|
| - Speed Selector (40/80 L/min)  | - Three-Phase Motor                       | - Custom Nozzles and Sleeves          |
| - Electro-mechanical Totalizers | - Fleet Management                        | - Flexible Riser Connection           |
| - Volume Preset                 | - AdBlue Hydraulic Housing Heating (ATEX) | - Stainless Steel AISI304 Image Panel |
| - Circuit Breaker               | - AdBlue Hydraulic Housing Heating        | - Stainless Steel AISI316 Housing     |
| - Electronics Head Heating      | - Low Temperature Kit                     | - Foundation Frame                    |
| - Vapour Recovery Stage II (*)  | - Satellite Ready                         | - Custom Corporate Image              |
| - Single-Phase Motor            | - Breakaway Couplings                     | - Hose Mast                           |


(\*) Only available with suction pumps.

# ✓ AVAILABLE CONFIGURATIONS


P1000 - 1P1H - STANDARD HOSE BRACKET

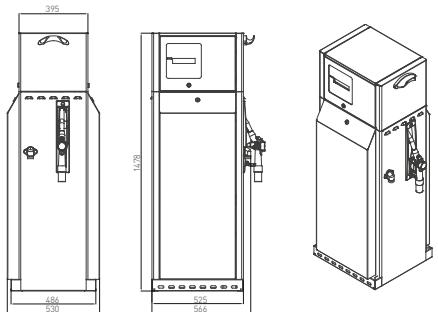


P1000 - 1P2H - STANDARD HOSE BRACKET

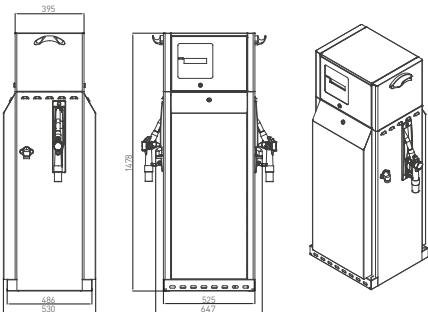


P1000 - STANDARD HOSE LENGTH




P1000 - 1P1H - HOSE MAST

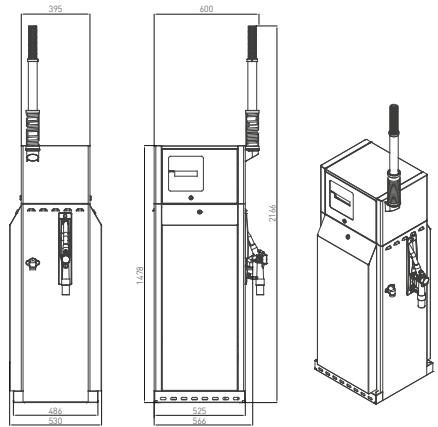


P1000 - 1P2H - HOSE MAST

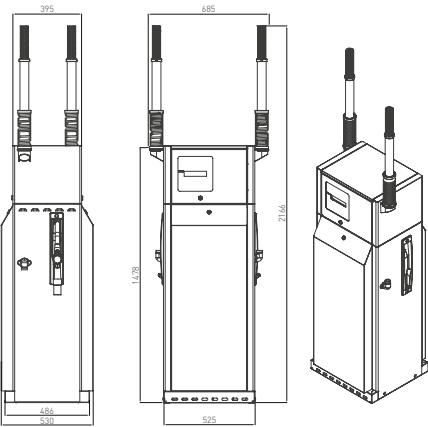


P1000 - HOSE MAST LENGTH

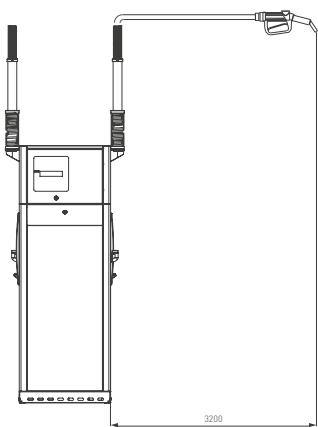

P1000 - 1P1H - AdBlue with heating

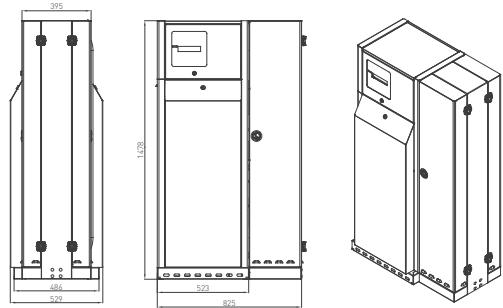

P1000 - AdBlue HOSE LENGTH



Note: All dimensions are in mm.

Petrotec Official Distributor



© 2018 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

