



# DISPENSING SOLUTIONS › PROGRESS 2000

## ▼ TECHNICAL SPECIFICATIONS

MAIN FEATURES	
<b>Construction</b>	Frame: Galvanised Steel; Double Coated Painting Housing: Stainless Steel Panels: Aluminium; Double Coated Painting
<b>Admission</b>	Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump
<b>Meter</b>	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration
<b>Filters</b>	Reusable Stainless Steel, 100 µm mesh
<b>Motor</b>	Exd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection
<b>Display</b>	Larger and brighter display, providing crisp digits under any lighting conditions. 7 digits for sale (31,75mm), 7 digits for volume and 6 digits for unit price
<b>Calculator</b>	eMC <sup>2</sup> Electronic Modular Calculator, 2nd Generation
<b>Hose</b>	Ø16, 19, 21, 25, 32 mm (EN1360/EN13483) (VR2 Approved)
<b>Nozzle</b>	Automatic ZVA2 or Others
<b>Fuel Types</b>	Petrol   Diesel   Biodiesel   HVO   Ethanol (E85) <sup>(1)</sup>   LPG <sup>(1)</sup>   AdBlue wo/heating <sup>(1)</sup>
<b>Flow Rates</b>	10, 40, 80, 130, 160, 200 L/min   Up to 2 Products/2 Hoses
<b>Certificates</b>	ATEX; MID


(1) Only available with pressure version.

OPTIONS		
- Speed Selector (40/80 L/min)	- Voice Module	- Foundation Frame
- Electro-mechanical Totalizers	- Low Temperature Kit	- Custom Corporate Image
- Volume Preset	- Satellite Ready (1 per side)	- TAGs
- Amount Preset	- Breakaway Couplings	- Hose Mast (not available with LPG or 160-200 LPM)
- Circuit Breaker	- Custom Nozzles and Sleeves	- Main Safety Switch (LPG)
- Electronics Head Heating	- Flexible Riser Connection	- Vapour Recovery Stage II
- Automatic Temperature Compensation	- Stainless Steel AISI304 Image Panel	- Vapour Recovery w/Monitoring
- Single/ Three-Phase Motor	- Stainless Steel AISI316	


COMMUNICATION PROTOCOLS/INTERFACES		
- Petrotec	- IFSF IP	- HDX 2WI (Gilbarco)
- EPSS	- IFSF Lon v1.xx (Converter)	- DART
- Pulse Interface	- IFSF Lon v2.xx	- Dunclare
- ER3	- HDX 485 (Gilbarco)	- Pumalan

# ✓ AVAILABLE CONFIGURATIONS


P2000 - 1P1H - STANDARD HOSE BRACKET

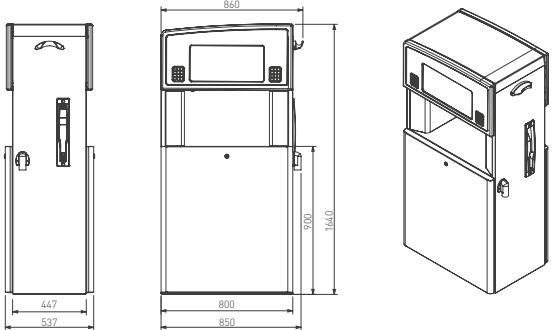


P2000 - 2P2H - STANDARD HOSE BRACKET

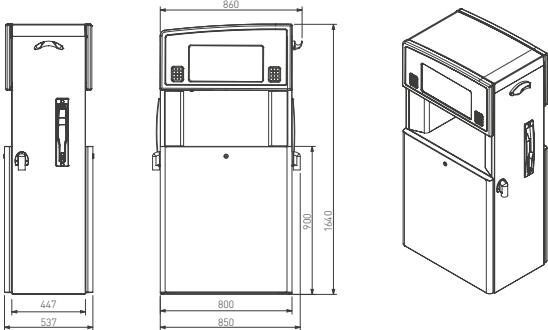


P2000 - 1P1H - HOSE MAST

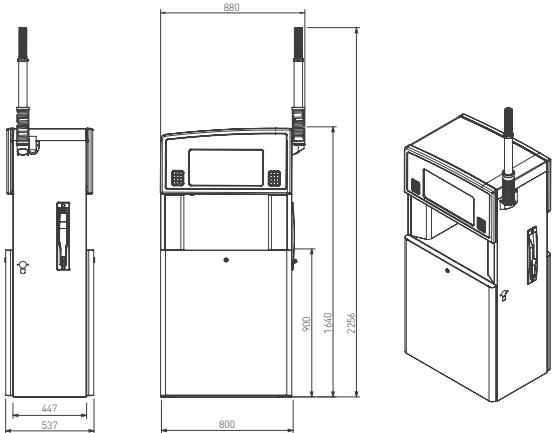


P2000 - 2P2H - HOSE MAST

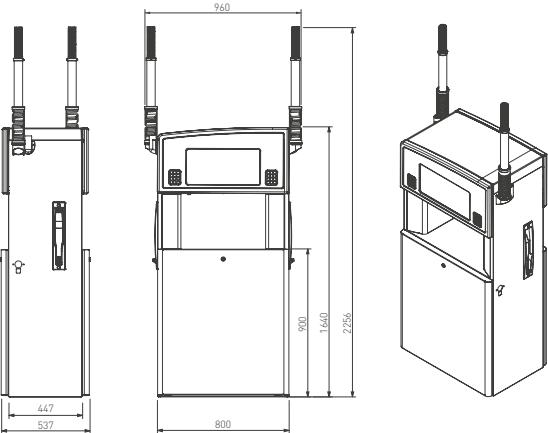

P2000 - STANDARD HOSE LENGTH

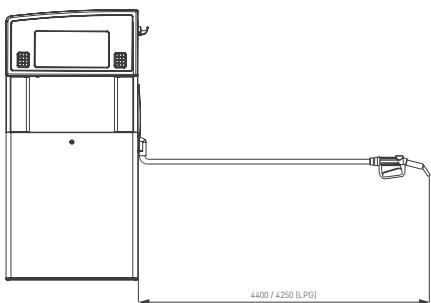

P2000 - HOSE MAST LENGTH

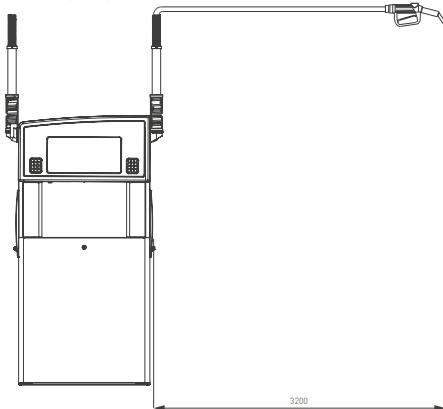

Note: All dimensions are in mm.

MOD. IBPROGRESS2000 01.2026

© 2023 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

