

AXON 4000

DISPENSING
SOLUTIONS

Flexible Solution.

The A4000 dispenser has two possible H-style form factors, depending on the forecourt set up and on the number of hoses selected. It is the right choice for those looking for full features and multiple configurations, while saving on space.



Maximum efficiency aligned with a great user experience.

Hose Retraction

Touchscreen with modern look and feel

Modular payment module

Solid Construction Frame

Easier Maintenance and Serviceability

THE A4000 IS
TAILORED TO YOUR
BUSINESS GROWTH.

With a solid common unibody frame you can fully adapt it to your needs while keeping a small form-factor.

 Up to 130l / min

 OPT Multimedia

 Multiple Fuel Types

 Up to 8 Hoses

 Up to 4 Fuel Grades

Certificate: ATEX | MID

 < 1000 kg (+/- 5%) kg

 2200 x 800 x 800 mm




TECHNICAL SPECIFICATIONS

Admission	Suction: High Performance Compact Gear Pump PPS Pressure: Submersible Pump	Options	Speed Selector
Meter	Positive displacement meter, with pulse generator		Voice Module
Filters	Reusable stainless steel, 100 µm mesh, standard area of 120 cm ² , optionally available with 260 cm ²		Electro-mechanical totalizers
Spin-On Filters⁽¹⁾	Feature providing additional filtration capability for our equipment. 10 or 30 µm available		Circuit breaker
Motor	Exd, single/three-phase, 50/60 Hz w/ internal thermal protection		Electronics head heating
Calculator	iMC		4 Filling points
Hose	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 approved)		FM27
Nozzle	Automatic ZVA2 or others		Vapour recovery stage II
Flow Rates	10, 40, 60, 80, 130 l/min	Vapour recovery w/ monitoring	
Comm Protocols	Petrotec, EP55, Pulse Interface, ER3, IFSF IP, IFSF Lon, HDX 485 and HDX 2WI (Gilbarco), Dunclare, Pumalan, HDX IP (Tesco)	Automatic temperature compensation	
Display	Touchscreen • Tempered Glass • Volume and amount preset	Single/three-phase motor	
		Satellite ready (1 per side)	
		Breakaway couplings	
		Custom nozzles and satellite	
		Flexile riser connection	
		Foundation frame	
		Customer corporate image	
		Stainless steel AISI316 housing	
		OPT ⁽²⁾ Multimedia	
		Overground Tank Option	
		Safety	Emergency button
			Panel access swith detection
			Log Recorder*

(1) Only available for Pressure version;
 (2) Integration with a wide range of terminals.
 (*) Only available with select protocols HDX, IFS & Pumalan

DIMENSIONS

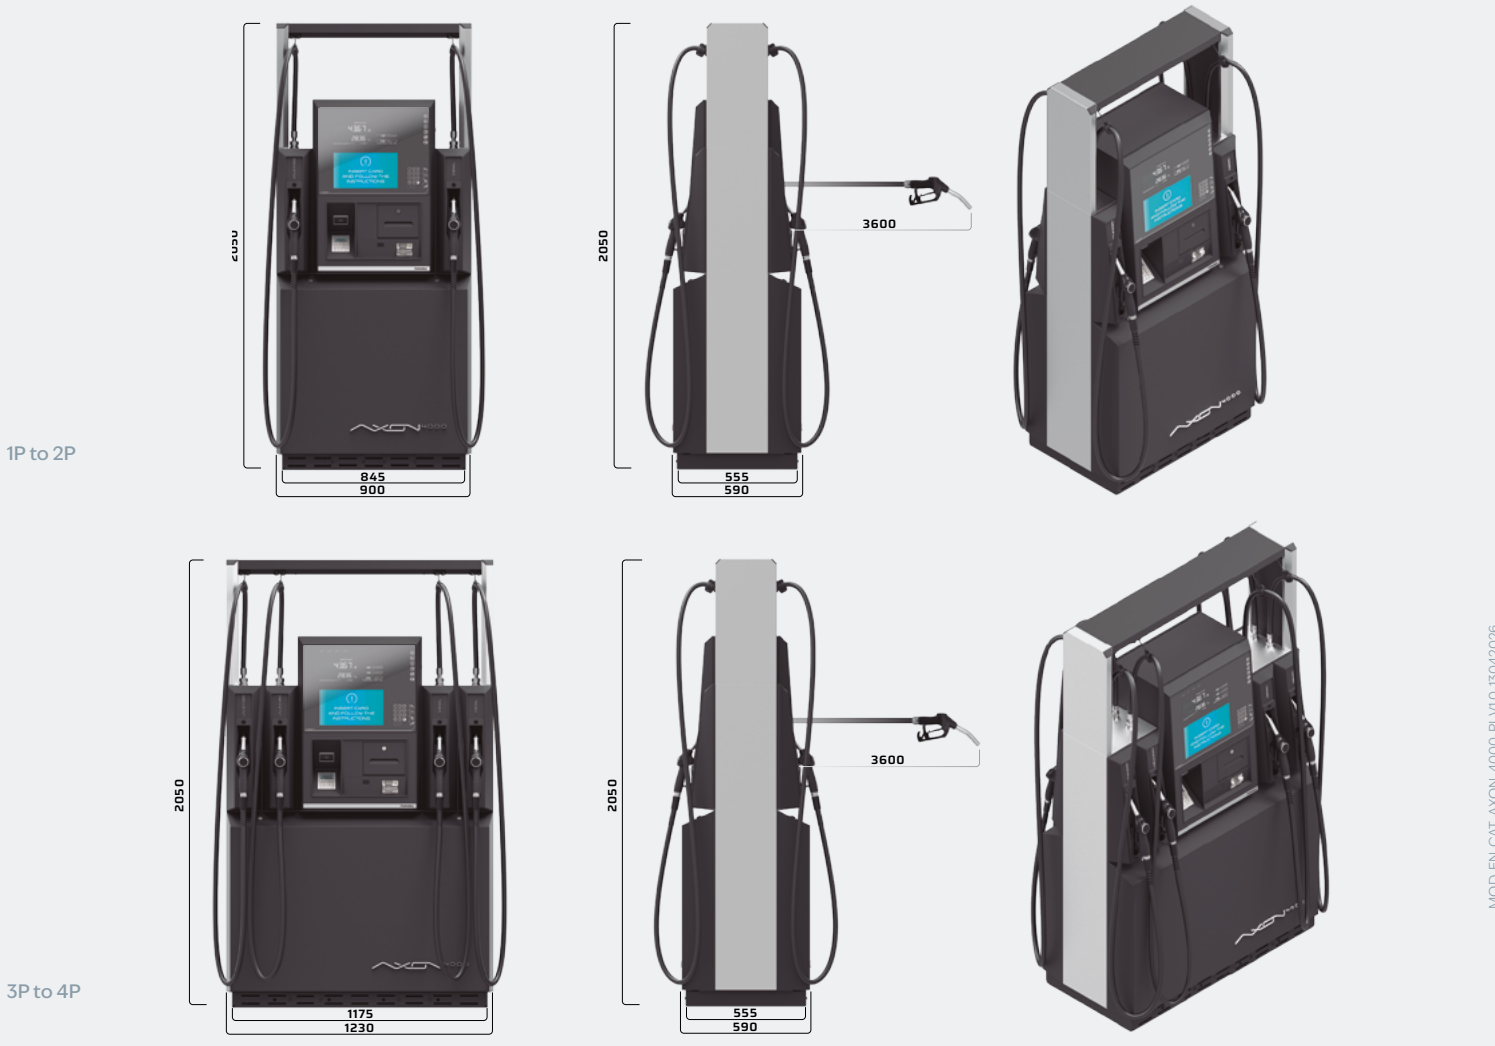

MOD.EN.CAT.AXON_4000.PL.V10.13.04.2026

